

# DATA SHEET



## Conference Room Video Hub - HDMI® and USB-C®

Allows four devices to connect to the conference room display

### OVERVIEW

The Conference Room Video Hub is the perfect addition to display and share 4K content in conference rooms and huddle spaces, allowing multiple users to connect and switch between their laptops and tablets—all over a single HDMI cable connected to the display.

#### Easy to Use

No drivers or apps needed. The video hub allows two HDMI and two USB-C laptops or tablets to be connected to a single HDMI output. The source selection switch allows you to manually select the input, or if you prefer auto-switching, the hub connects to the last who plugged in. White LED lights over the connected inputs conveniently indicate which source is currently selected.

#### Easy to Install

Mounting under a table is not always practical or ideal. The wired video hub has been designed to be a table top solution, so no worrying about retrofitting or cutting into an existing table. CEC control simplifies the connection by switching the conference room TV to the correct input. For added piece of mind, you can attach a specialised security cable to the hub's security slot.

#### Cables Included

Save time and money—be ready to connect right out of the box with the included 0.9m HDMI cable and 0.9m USB-C cable.

### FEATURES

- Connections support up to a 4K video resolution, so meeting attendees will be able to see the displayed content for improved comprehension and detailed decision making.
- Plug-and-play, no drivers or apps needed for you to connect
- CEC control connects the video hub to the correct TV input
- 0.9m HDMI and 0.9m USB-C cable included, so you don't have to wait for your additional cables to arrive

### ITEM DESCRIPTION

84310 Conference Room Video Hub - HDMI® and USB-C®

# DATA SHEET

## SPECIFICATIONS:

### Conference Room Video Hub - HDMI® and USB-C®

#### SIGNAL SPECIFICATIONS:

- HDMI Input: 4K, 1080p, 1080i, 720p, 576p, 480p
- Digital Audio: AC-3, DTS, DTS-HD & Dolby True HD

#### ELECTRICAL SPECIFICATIONS:


- Power Supply: 100 V–240 V AC in, DC jack 12V/1A DC out brick power adaptor
- HDMI: HDMI 2.0
- HDMI: HDCP 1.4/2.2 Source & Sink Compliant
- HDMI: Y'CbCr 4:4:4 / 4:2:2 color format
- HDMI: BT2020 colour space
- HDMI: Maximum bandwidth to 18.0 Gbit/s

#### PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0°C to 40°C

#### PHYSICAL CHARACTERISTICS:

- A/V Interface: HDMI Input: Type A × 2
- A/V Interface: USB: USB Type-C × 2
- A/V Interface: HDMI Output: Type A × 1
- Power: Power Input: Via DC jack
- Buttons: Power: –
- Buttons: Source Selection: Yes (one tactile switch)
- Buttons: Device Pairing: –
- LEDs: Power LED: –
- LEDs: Source Selection LED: 4\* LED (white)
- Environmental: RoHS , WEEE , Prop-65 , REACH , Conflict Minerals
- Regulation: FCC, IC & CE

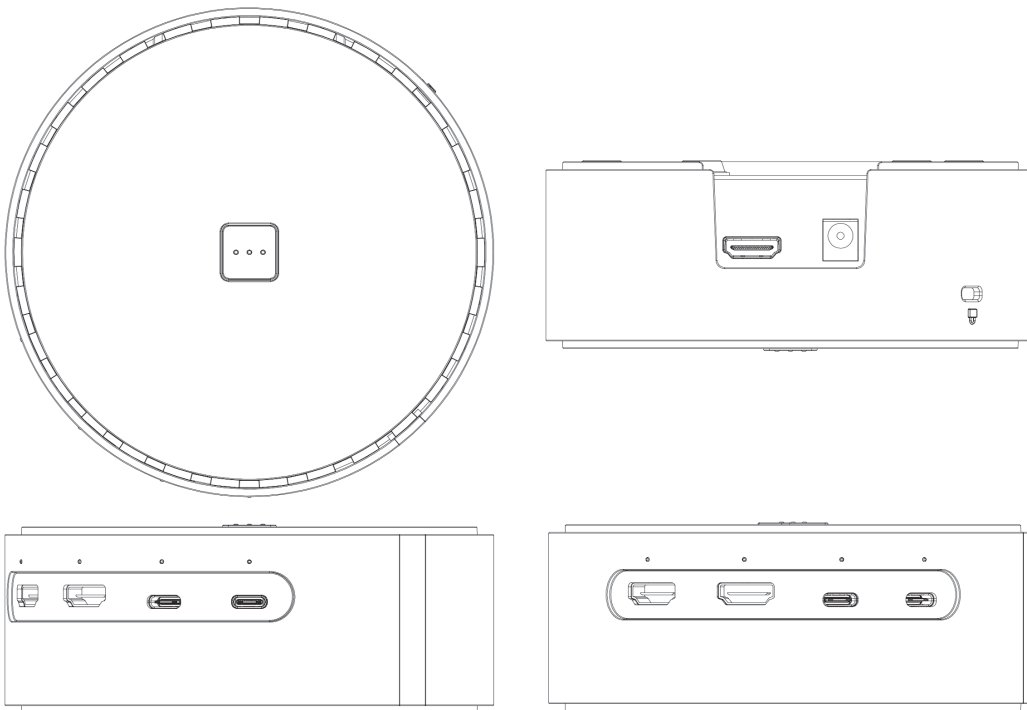

#### Marketing & Sales Office

Great King Street North | Birmingham | West Midlands | B19 2LF  
UK Phone (0)800 328 2916 | EMEA Phone +44 (0)1952 677300 | www.c2g.com/uk

**C2G**  
A brand of **legrand**

Follow Us

